

V-Band Harmonic Mixer, Keysight Spectrum Analyzer

Description:

Model SFH-15SFSF-A1 is a V-Band balanced harmonic mixer that is specially designed for use with Keysight's spectrum analyzer series. The mixer employs high performance, GaAs Schottky flip chip diodes and a balanced configuration to produce superior RF performance. With an IF range of DC to 1.3 GHz, the harmonic mixer uses the harmonic number 18 of a 3.0 to 6.1 GHz LO at +16 dBm to translate 50 to 75 GHz. The harmonic mixer has a conversion loss of 40 dB.



Features:

- Full Waveguide Band Operation
- No External Bias Required
- 14th Harmonic Detection

Applications:

- Keysight Spectrum Analyzers
- Frequency Meters
- Phase Locked Loops

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Range	50 GHz		75 GHz
LO Frequency	3.0 GHz		6.1 GHz
IF Range	DC		1.3 GHz
Input Power		+16 dBm	+19 dBm
Number of Harmonics		14	
Conversion Loss		40 dB	


Mechanical Specifications:

Item	Specification
RF	WR-15 Waveguide with UG-385/U Flange
LO	SMA (F)
IF	SMA (F)
Case Material	Brass
Finishing	Gold Plated
Weight	5.5 Oz
Outline	FH-V2


V-Band Harmonic Mixer, Keysight Spectrum Analyzer

Typical Conversion Gain vs. Frequency

$P_{RF} = -20 \text{ dBm}$

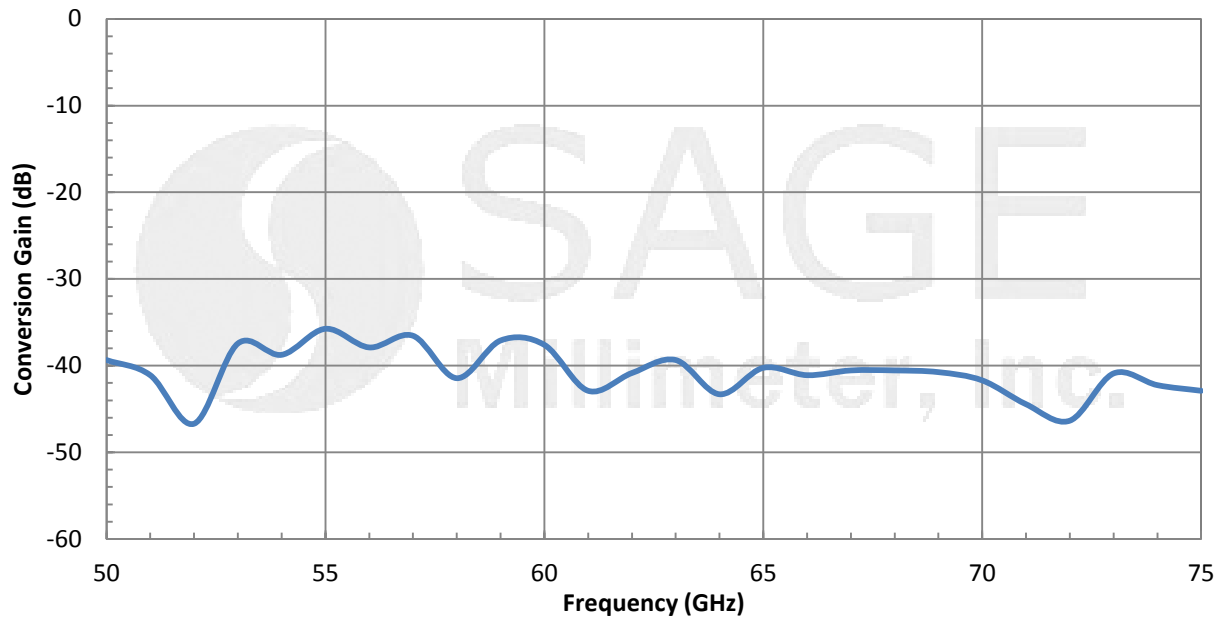

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

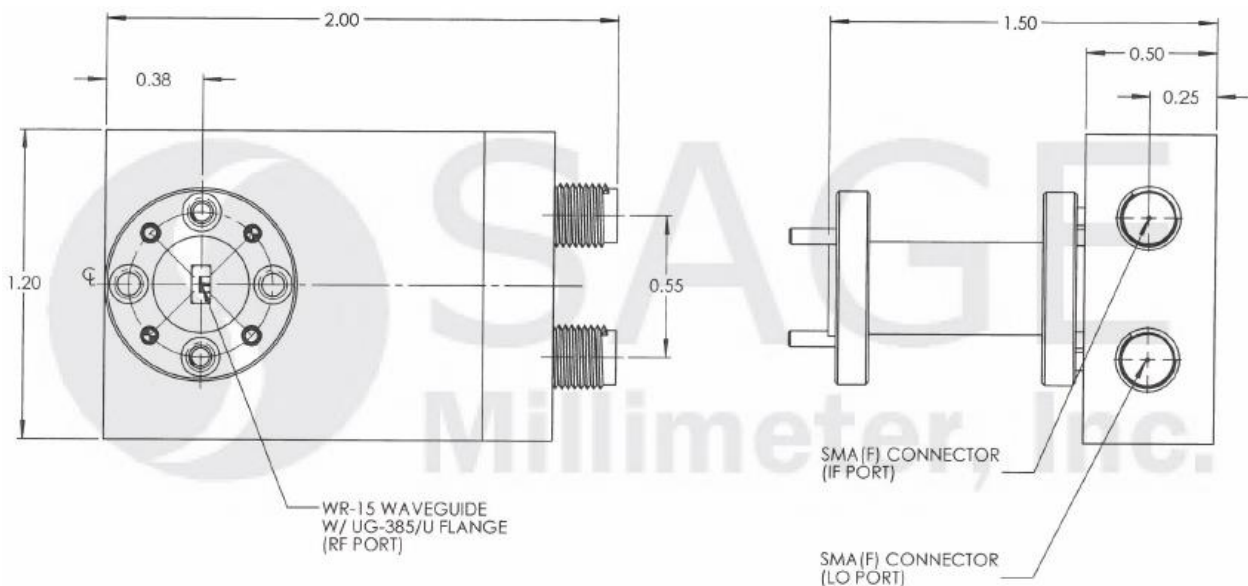



V-Band Harmonic Mixer, Keysight Spectrum Analyzer

Note:

- All data are presented using a limited sample lot. Actual data may vary unit to unit.
- All testing was performed under 25°C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings of the mixer will damage the device.
- Any foreign objects in the waveguide will degrade performance and/or damage the device.
- The mixer is a static sensitive device. Always follow ESD rules when working with the mixer.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.92 ± 0.05 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

