

DATASHEET, 768A, Coaxial Fixed Attenuators



- Average power:20W coaxial attenuators series
- Peak Power:1 kW max
- Impedance:50Ω
- Small size
- Stainless Steel Connectors
- N Connectors



Model	Frequency (GHz)	Attenuation dB (Nominal)	Attenuation dB (Deviation DC-11)	Average Power (W)	VSWR (max)	Connector Type
768A-3	DC-11	3	±0.75	20	1.30	N (M,F)
768A-6	DC-11	6	±0.75	20	1.30	N (M,F)
768A-10	DC-11	10	±0.75	20	1.30	N (M,F)
768A-20	DC-11	20	±0.75	20	1.30	N (M,F)
768A-30	DC-11	30	±0.75	20	1.35	N (M,F)

*Temperature Coefficient: 0.0006 dB/dB/°C; Power Coefficient: 0.0005 dB/dB/W

Size:

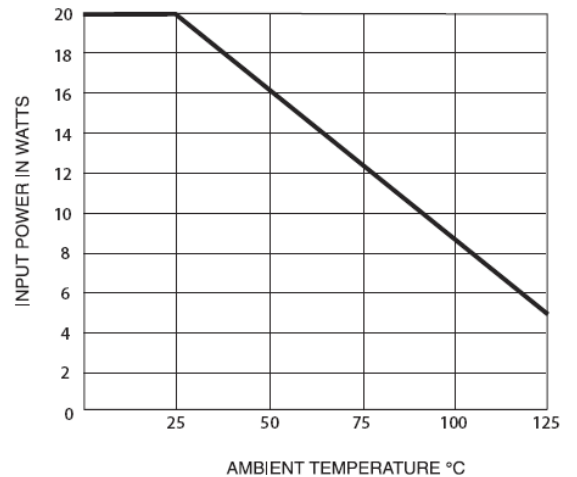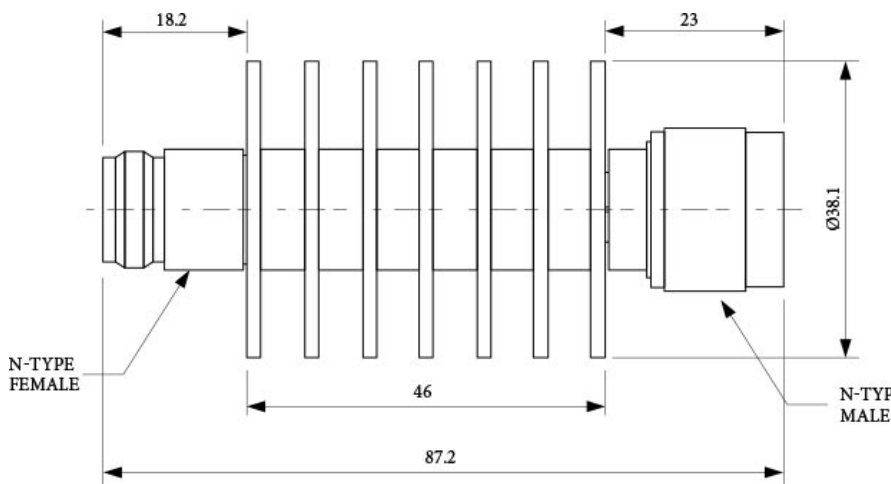

Model	A (mm)	B (mm)	Weight (kg)
768A	87.2	Ø38.1	0.159