


Specifications			
Connector	K	Style	Low Insertion Loss
Frequency Range	DC - 40 GHz	Bending radius	30 mm
Impedance	50 Ω	Heat Shrinkable Tube Material	PE with Black
Dimensions	Φ3.6 mm	Marking	Production Date with Number
Speed Ratio	77 %	Weight, approx.	40 g / m
Insertion Loss (Max / m @ 20°C)	1.10 dB @ 3 GHz 1.60 dB @ 6 GHz 2.10 dB @ 10 GHz 2.73 dB @ 15 GHz 3.20 dB @ 18 GHz 4.50 dB @ 35 GHz 5.0 dB @ 40 GHz	Temperature (Ambient Range)	-55 to +200°C

Part Number Selection

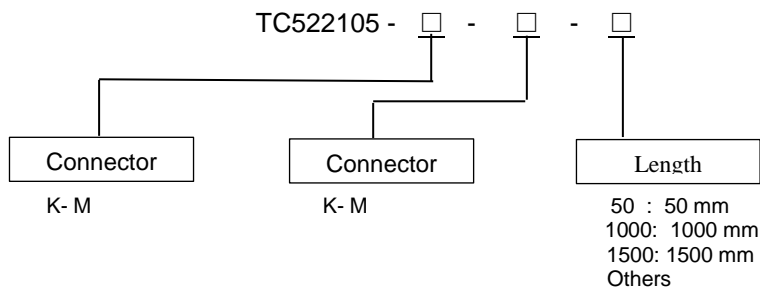

Molexy reserves the right to change this Datasheet without notice!